



C-101BAH-(AD)DS

Self-Contained Cubelet Ice Machine
with Built-In Storage Bin



C-101BAH-(AD)DS
01/21/18
Item # 13324

W x D x H

C-101BAH / C-101BAH-DS
14⁷/₈" x 22⁵/₈" x 33¹/₂"

C-101BAH-AD / C-101BAH-ADDS
14⁷/₈" x 22⁵/₈" x 31¹/₂"

(-AD) - ADA Compliant 

(-DS) - Customized Cabinet Door System



C-101BAH
Air-Cooled
(Shown)

C-101BAH-AD
Air-Cooled
ADA Compliant Unit



C-101BAH-DS*
(Shown)
with Custom Cabinetry

C-101BAH-ADDS*
Air-Cooled
ADA Compliant Unit

**Customer responsible for providing cabinetry*



Item #: _____

Project: _____

Qty: _____

AIA#: _____

Features

► UL approved for outdoor use

► Undercounter design

► Drain pump option available

- Up to 92 lbs. of ice production per 24 hours
- Built-in storage capacity of 0.7ft³/22 lbs.*
- Power switch accessible without panel removal
- Less than 34 inches tall (C-101BAH, C-101BAH-DS)
- Less than 32 inches tall; ADA Compliant (C-101BAH-AD, C-101BAH-ADDS)
- Easily disassembled water circuit for easy cleaning
- Front in and out airflow
- Equipped with 6 ft. Cord with NEMA 5-15 Plug
- R-134A Refrigerant

Warranty:

2 Year Parts & Labor on entire machine.


1 Year Parts & Labor on HS-5061 Drain Pump Assembly.

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

**Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.*

Condenser	Model	ICE PRODUCTION		Type of Ice (Hardness Rating)	WATER USAGE		ELECTRICAL					Shipping Weight	ENERGY STAR®
		Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F			Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Max. Fuse Size or HACR Circuit Breaker	Amperage	Voltage	Heat Rejection BTU/hr.		
Air-Cooled	C-101BAH-(DS)	92	62	Cubelet (81.6)	12.0	N/A	12.1	15A	4.0A	115V/60/1	1,850	120 lbs.	
Air-Cooled	C-101BAH-AD-(DS)	92	62	Cubelet (81.6)	12.0	N/A	12.1	15A	4.0A	115V/60/1	1,850	120 lbs.	

Cubelet Dimensions*



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 7 - 113 PSIG
- Voltage Range 104-127V

Service

- Allow 15" (38 cm) at front and enough space at rear for water supply and drain connections.
- Location must provide a firm and level foundation.
- Do not place near ovens, grills or other high heat producing equipment.

Parts

- -DS Door Reversal Part - HS-0229
Optional Kit required for (-DS) models
- Side trim kit available
- Accessory - HS-5061 Drain Pump Assembly
- Water filter - H9320-51

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 1/2" Nominal ID Hard Pipe or Equivalent




C-101BAH-(AD)DS

Self-Contained Cubelet Ice Machine
with Built-In Storage Bin




C-101BAH-(AD)DS
01/21/18
Item # 13324

FRONT VIEW

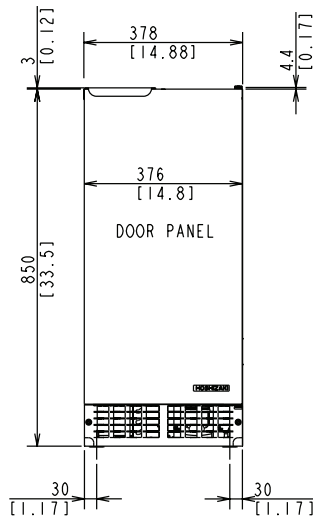


C-101BAH/C-101BAH-DS

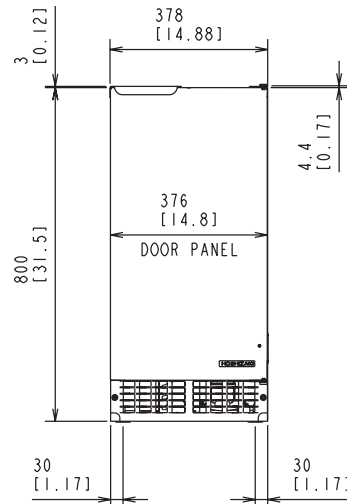

C-101BAH-AD/C-101BAH-ADDS


mm
[inch]

TOP VIEW

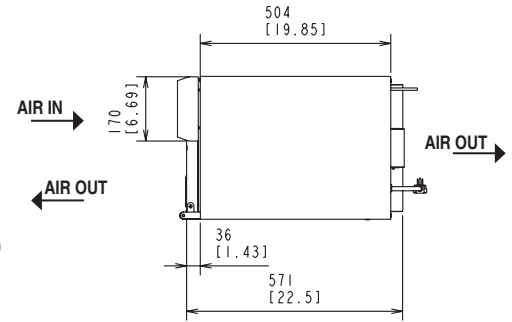


C-101BAH
C-101BAH-AD
C-101BAH-DS
C-101BAH-ADDS

REAR VIEW

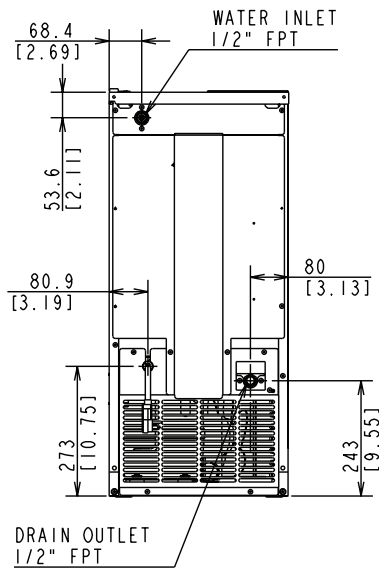


C-101BAH/C-101BAH-DS

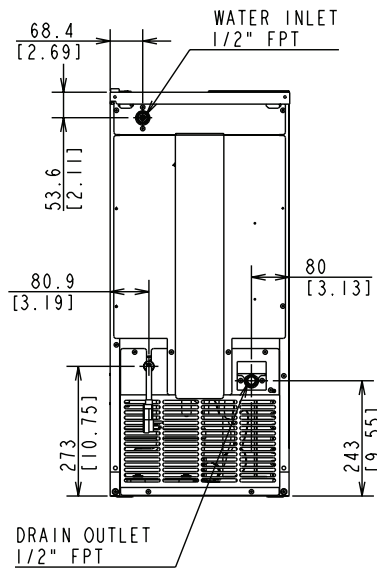


C-101BAH-AD/C-101BAH-ADDS

SIDE VIEW

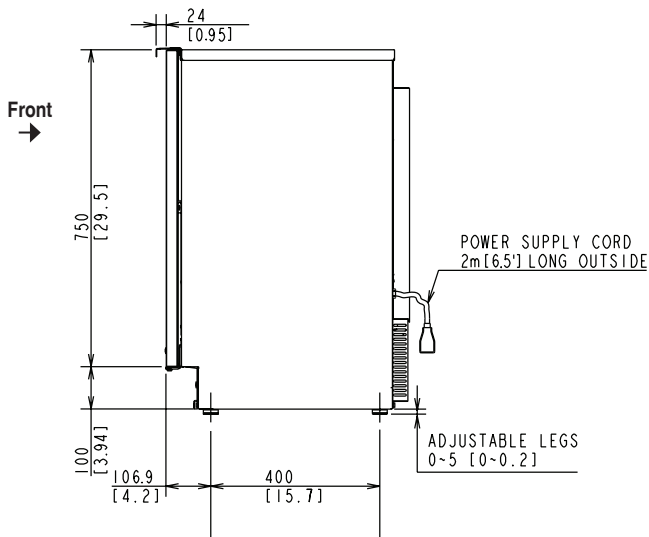

C-101BAH/C-101BAH-DS

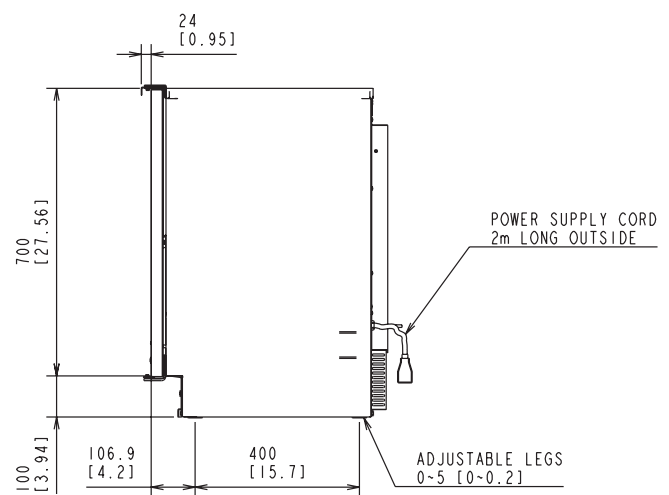

C-101BAH-AD/C-101BAH-ADDS