

F-1001MLJ

MODULAR FLAKER ICE MACHINE

LOW-SIDE SERIES

Item # _____

Project: _____

Qty: _____
*AutoCad available on KCL

F-1001MLJ

4/22/16

Item #13345

FLAKER DIMENSIONS

W x D x H

F-1001MLJ

22 x 27^{3/8} x 25^{15/16}*

* Requires a rack system for installation



F-1001/B-300



F-1001/B-500



B-700



B-800



B-900

Also available
on Large Bins:

B-1150SS

B-1300SS

B-1500SS

B-1650SS

*FLAKED ICE DIMENSIONS



*approximate size, image not to scale

F-1001MLJ*

Air-Cooled

Shown on an optional

B-700

* Requires a rack system
for installation



- Up to 1150 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Protected by H-GUARD Plus Antimicrobial Agent
- Advanced CleanCycle24™ Design
- Removes sediment
- Clean pure ice
- Longer life and easy maintenance
- R-404A Refrigerant



© HOSHIZAKI AMERICA, INC.

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on Compressor, air-cooled condenser.



F-1001MLJ MODULAR FLAKER ICE MACHINE LOW-SIDE SERIES

DIMENSIONS W x D x H

F-1001MLJ
22 x 27^{3/8} x 25^{15/16}"

* Requires a rack system for installation

• Air-cooled

AIR-COOLED - F-1001MLJ

Water Temp° F.	50°	70°	90°
Air Temp° F.			
70°	1150	1124	1074
80°	1026	980	936
90°	894	871	816

UTILITY CONSUMPTION

Model Number	KWH per 100 LBS.		Potable Water Gal. per 100 lbs.	
	90/70	70/50	90/70	70/50
F-1001MLJ	1.9	1.4	12.0	12.0

SPECIFICATIONS

Model Number	Amperage	Min. Circuit Ampacity	Shipping Weight
F-1001MLJ	3.5	20	150 lbs.

STORAGE BINS

Model Number	AHRI-Rated Capacity*
B-300	260 lbs.
B-500	360 lbs.
B-700	550 lbs.
B-800	600 lbs.
B-900	660 lbs.
B-1150	900 lbs.
B-1300	950 lbs.
B-1500	1120 lbs.
B-1650	1210 lbs.

*Rated in accordance with AHRI Standard 820 (I-P)


ELECTRICAL & PLUMBING/F-1001MLJ

- 115V/60/1
- Ice maker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Ice maker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent




© HOSHIZAKI AMERICA, INC.


618 Hwy. 74 S., Peachtree City, GA 30269

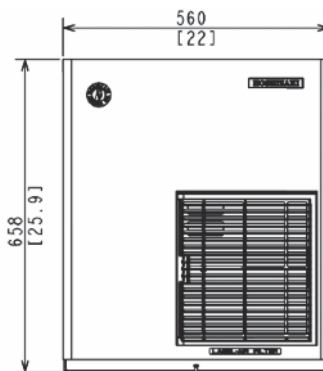


FRONT VIEW
(Remote)



SIDE VIEW

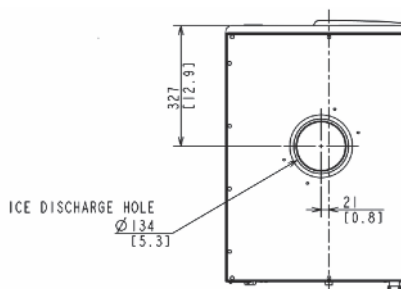

ICE DROP ZONE

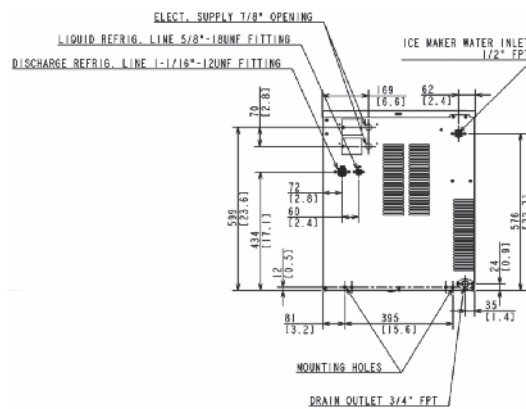

BACK VIEW

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

OPERATING LIMITS/URC-5F

- Ambient Temp Range -20°F - +122°F
- Voltage Range 104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter.



TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.