

# F-330BAH

## SELF-CONTAINED FLAKER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

F-330BAH

6/10/15

Item # 13200


### FLAKER DIMENSIONS W x D x H

**F-330BAH**  
24 x 26 x 39\*  
\*with 6" legs

### F-330BAH Air-Cooled Shown



### \*FLAKED ICE DIMENSIONS



\*approximate size, image not to scale

- Up to 330 lbs. of ice production per 24 hours
- Up to 80 lbs. built-in storage
- Corrosion resistant stainless steel
- Automatic flush system designed for longer life and dependability of ice machine
- Evaporator assembly protected from peak loads
- Convenient drop down door
- Front access for easier maintenance
- Removable air filter
- Front in, front out airflow - allows for easier fit into tight spaces with no clearance needed on sides and rear
- R-404A Refrigerant
- Protected by H-GUARD Plus Antimicrobial Agent 

\* The F-330BAH is ENERGY STAR qualified.

### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine. (Serial numbers Vxxxxx) and after.)

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



ISO9001-ISO14001

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com



# Hoshizaki

## SELF-CONTAINED FLAKER WITH BUILT-IN STORAGE BIN

F-330BAH

**DIMENSIONS**  
W x D x H

**F-330BAH**  
24 x 26 x 39"  
\*with 6" legs

• Air-cooled

**AIR-COOLED**

Water Temp° F.	50°	70°	90°
Air Temp° F.	70°	315	300
80°	290	280	270
90°	255	<b>250</b>	235

**UTILITY CONSUMPTION**

Model Number	KWH per 100 LBS.		Potable Water Gal. per 100 lbs.
	90/70	70/50	
F-330BAH	5.8	4.1	12.0



**SPECIFICATIONS**

Model Number	Condenser	Min. Circuit Ampacity	Shipping Weight
F-330BAH	Air-Cooled	N/A	178 lbs.


**STORAGE BINS**

Model Number	Application Capacity
F-330BAH	Built-in 80 lb. capacity


- Circuit breaker or fuse protects gear motor from overload.
- Gear motor runs one minute after termination of ice making to clear all ice from evaporator.

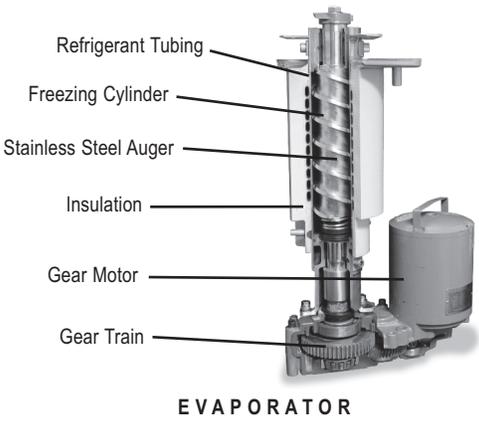


TOP VIEW

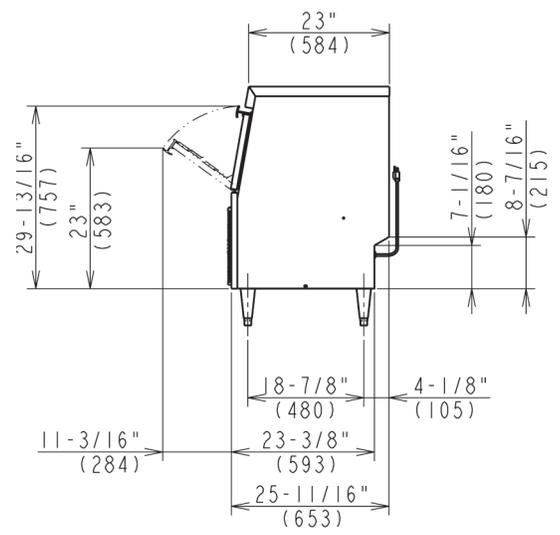

SIDE VIEW

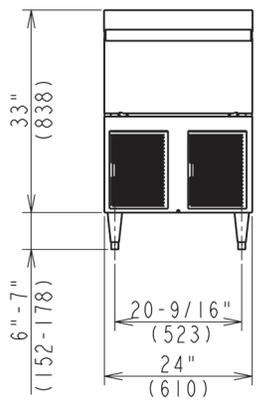

FRONT VIEW

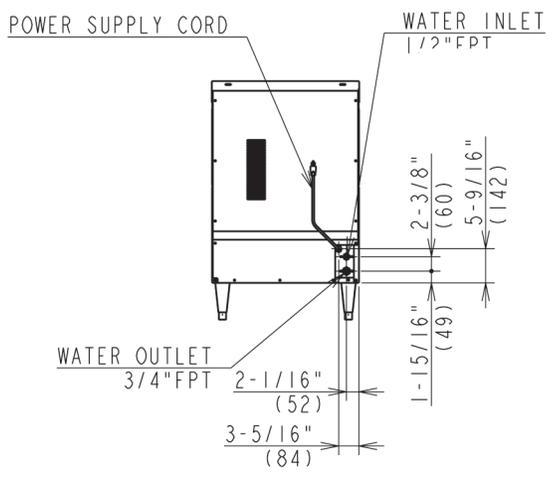

REAR VIEW

**ELECTRICAL & PLUMBING/F-330BAH**

- 115V/60/1
- Ice maker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Ice maker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

**OPERATING LIMITS**

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

**SERVICE**

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters

