



# RM-49

## Glass Door Merchandiser with Swing Door



RM-49  
08/24/18  
Item # 13405

**W x D x H**  
60" x 29.75" x 78"

**RM-49**



### Dimensions / Capacity

	One Section RM-49
Interior Storage Capacity (CF)	49 ft <sup>3</sup>
Overall Width x Depth	60" x 29.75"
Height	78"
Depth with Door Open	58.1"
Adjustable Shelves	5 per section
Shelf Dimensions (W x D)	27" x 21.75"
Crated Shipping Weight	585 lbs.
Crated Width x Depth x Height	64" x 34" x 84"

### Electrical / Refrigeration

	One Section RM-49
Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P
Voltage Range	104-126
Ambient Temp. Range	60° to 86°F
Control Setpoint Range	34° to 40°F
Amperage	7.1
Energy Consumption (kWh/day) @ASHRAE	4.19
Approx. Nominal Compres. BTU/HR (HP)	1357 (1/2HP)
Refrigerant / Charge Amount (oz)	R-134a / 17oz.

### Options

- ☐ Organizer shelf (HS-5295)      Requires 2 sets of:  
☐ Price tag holder (HS-5296)      ☐ 4" Casters (HS-5288)  
☐ Epoxy Shelf (HS-5319)      ☐ 2.25" Casters (HS-5037)

### Warranty

- \* 3 Year - Parts and Labor on entire machine.  
5 Year - Parts on Compressor  
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## Features

- ▶ Curved vertical corners with silver aluminum exterior provide enhanced product display
- ▶ Electronic controller with visual and audio high and low temperature alarms
- ▶ Forced air evaporator for quick temperature pull down

- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled products.
- Large glass doors are energy efficient Low-E multi pane glass
- (5) white epoxy coated shelves per section with product stops are standard
- Automatic energy saving hot gas loop on front edge of refrigeration compartment helps prevent condensation particularly in hot humid environments
- LED illuminated exterior canopy
- Energy efficient vertical LED interior lights illuminate products on display
- Door is mounted on heavy duty hinges with self-closing mechanism
- Silver painted aluminum exterior with NSF approved white steel interior and stainless steel floor
- Electronic controller with energy saving mode will save approximately 40% energy consumption during non-peak hours
- Environmentally friendly CFC-Free Polyurethane insulation with cyclopentane blowing agent.
- Stainless steel shelf clips adjustable in 1/2" increments on anodized aluminum supports
- Refrigerant flow is controlled with a capillary tube
- 8 Foot cord and plug
- 2 inch leveling legs standard
- Three years parts and labor warranty
- Five-year compressor warranty

Capacity:  
20 oz. bottles: 630  
12 oz. bottles: 1440




# RM-49

## Glass Door Merchandiser with Swing Door




RM-49  
08/24/18  
Item # 13405


### FRONT VIEW

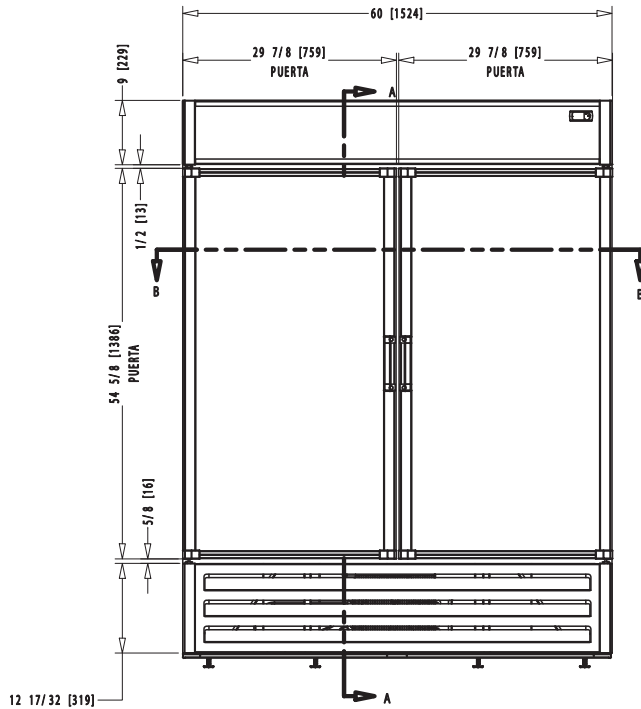


### SIDE VIEW

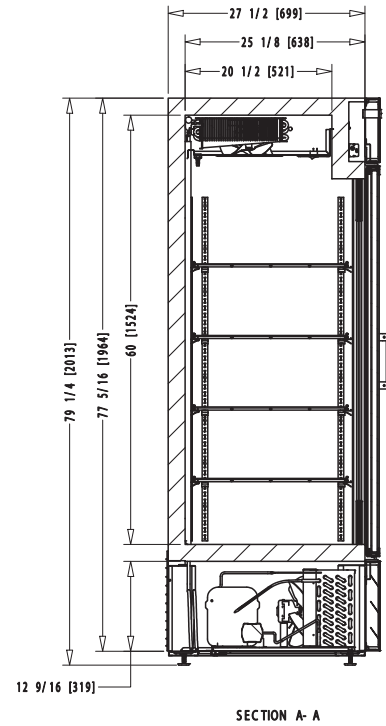

### PLAN VIEW

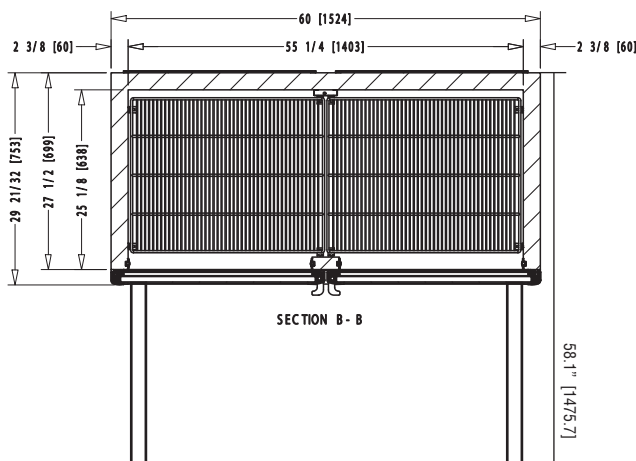

### HEADER DIMS

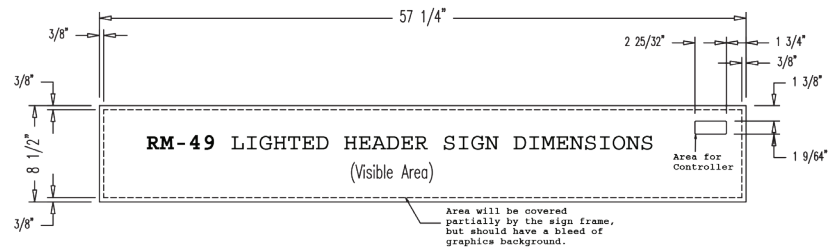

#### Graphic Requirements:

- 360 dpi resolution. Scale 1=1
- Colors for CMYK process
- Image with 1/4" of excess by side
- Graphics must be saved in photoshop (with layers) (or your sign company file type requirements)
- Include a full color print out

#### Material Requirements:

- Thickness: 1/16" (1.5mm)
- Good- Acrylic/Pexiglass, Better - high impact acrysteel, acrylite SG
- Best- Super impact Lexan, Lexan SG Polycarbonate

Note: Texts and important parts of the image should be within the visible area.  
The visible area is illustrated by dotted lines when it applies.

Printed in the U.S.A.