VR1A-FS

One Section Full Solid Door Refrigerator

W x D x H 26.88" x 32.00" x 81.70" including 4" casters)

















One Section

VR1A-FS

Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)	19.07 ft³
Overall Width x Depth	26.88" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	26.54" x 52.91"
Depth with Door Open at 90°	57.87"
Adjustable Shelves	3
Shelf Dimensions (W x D)	21.56" x 24.88"
Crated Shipping Weight	286 lbs
Crated Length x Depth x Height	33.50" x 28.75" x 83.88"
Electrical / Refrigeration	One Section VR1A-FS

33.50" x 28.75" x 83.88"
One Section VR1A-FS 115/60/1
15.0 Amps
5-15P 🚹
103-127
45° to 100°F
36° to 42°F
2.1
0.96
1461
R290 / (2.65oz)

Warranty

3 Year - labor on entire machine 4 Year - parts on entire machine 5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

VALIANCE. by 10 HOSHIZAKI



Item #:			
Project:			
Qty:			
AIA#:			


FEATURES


- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible no kit needed
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- . Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty: 44

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle



FRONT VIEW SIDE VIEW

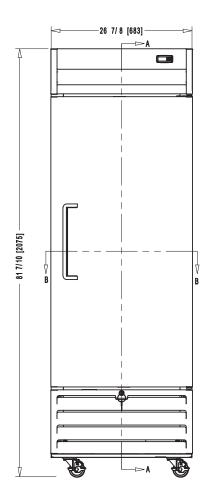

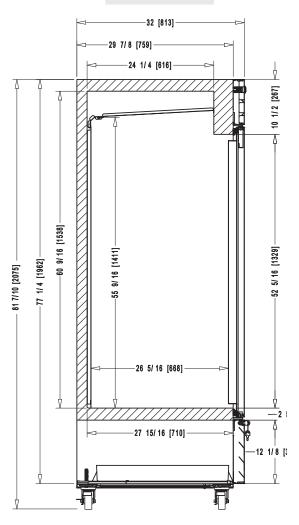

PLAN VIEW

