# VR2A-FS

## Two Section Full Solid Door Refrigerator

W x D x H 54.31" x 32.00" x 81.70" (including 4" casters)















**Two Section** 

VR2A-FS



#### **Dimensions / Capacity**

Interior Storage Capacity (CF) (AHAM)	42.45 ft <sup>3</sup>
Overall Width x Depth	54.31" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	22.63" x 52.31"
Depth with Door Open at 90°	57.5"
Adjustable Shelves	6
Shelf Dimensions (W x D)	23.94" x 25.16"
Crated Shipping Weight	471 lbs
Crated Length x Depth x Height	58" x 33.5" x 83.88"

Oratou Longtii x Doptii x Horgiit	00 X 00.0 X 00.00
Electrical / Refrigeration	Two Section VR2A-FS
Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P 🐧
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	36° to 40°F
Amperage	3.5
Energy Consumption (kWh/day) @ASHRAE	1.48
Appox. Nominal Compres. BTU/HR (HP)	2322(1/2HP)
Refrigerant / Charge Amount (oz.)	R290 / (4.1oz)

#### Warranty

3 Year - labor on entire machine 4 Year - parts on entire machine 5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.



VR2A-FS 05/12/25 Item #13737

Item #:	
Project:	
Qty:	
AIA#:	


# **FEATURES**


- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible no kit needed
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- . Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (three with brakes)
- 9 ft. cord and plug
- Cabinet Qty: 22

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle



FRONT VIEW SIDE VIEW

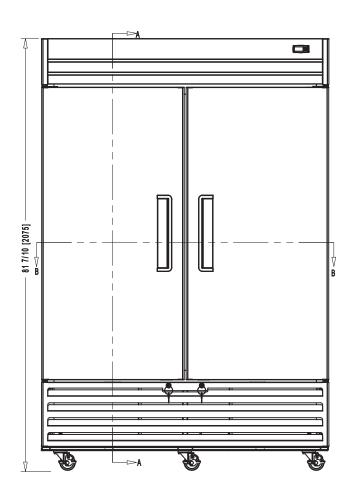

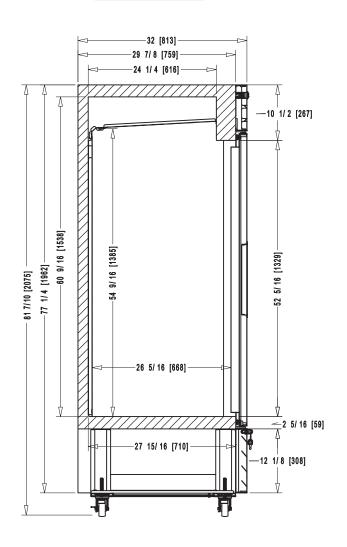

### **PLAN VIEW**

